

Report on a Kind of Portable Object Retrieval Clamp

Jiayang Xi^{1*†}, Jinhui Guo^{2†}

¹ISA Wuhan Wenhua High School, Wuhan, China

²School of Mechanical Engineering, Tianjin University, Tianjin, China

[†]These authors contributed equally to this work and should be considered co-first authors.

*Corresponding Author. Email: guojinhui462@126.com

Abstract. The current field of grippers has been developing for a long time; however, there are still niches that are seldom reached. Grippers for narrow spaces are still uncommon in the family of grippers. This study focuses on designing a portable object retrieval clamp for recovering lost objects from narrow settings, such as drainage grates. The device integrated a modular system with a foldable Yoshimura origami-inspired tubular arm, a motor-powered cable control system, and switchable effectors: one mechanical clamp for flat objects and one origami-based clamp for cylindrical or prismatic objects. There is also structural and mathematical analysis, including degree-of-freedom calculation and folding component relationships. Prototypes were built to test the effectiveness of designs, and control systems have been proven effective, offering a compact, adaptable solution for object recovery in confined spaces. Future work will focus on improving gripper interchangeability, enhancing arm control sensitivity, and optimizing materials for durability and performance.

Keywords: Portable retrieval clamp, Origami-inspired design, Yoshimura folding, Tomohiro folding, Modular system

1. Introduction

In the past 70 years, grippers have been developed to a new state; from the plain mechanical robotic clamps to adaptable soft material grippers, they have become increasingly advanced and effective. The grippers and clamps have many specialized divisions; in the aspect of control methods, they can be sorted into hydraulic, pneumatic, string-controlled, and self-contractable. On the other hand, the contracting structures can be classified into mechanical and origami structures. In daily life, people may sometimes lose their gadgets, ornaments, or keys in narrow spaces, such as the grates of drainage. These spaces are often deep and wet; there is also likely to be sludge or water submerging lost items. Traditional tools are of no avail in these situations, and human hands often cannot reach the items due to the thickness of the hand. So, in case this happens, we have built a multifunctional foldable gripper [1] for the specialized use of retrieving lost objects in narrow spaces.

2. Overall design

The design of the gripper is a modular configuration; the arm of the gripper is made out of a foldable tube in the pattern of Yoshimura origami, the batteries and control panel are packed at the top of it,

and the four sides of it are run through by controlling strings with stoppers attached at each end. The bottom end of the arm is equipped with a motor, which winds the controlling strings of the gripper heads up and down. The electrical wires go inside the tube and contract when the arm is folded. The gripper system is switchable, offering two gripper heads for selection. One mechanical gripper is designed for slim panel-like gadgets, such as a cell phone. Another origami gripper is for the retrieval of cylindrical or prism-like structures. Each of the grippers also consists of stoppers to hold them in place for contraction.(see figure 1)

The whole retrieval clamp can be folded separately; the grippers each have their working methods. Thus, they can be inserted into the narrow gaps first; then, the tube arm would fit into the gap in the folded and tilted state. After being lowered into the narrow space, the tube arm extends under its own weight and attaches to the surface of the drainage grates. Therefore, the retrieval clamp can be fully operated to pick objects under the obstacles. Sequences of operation are shown below in figure 2.

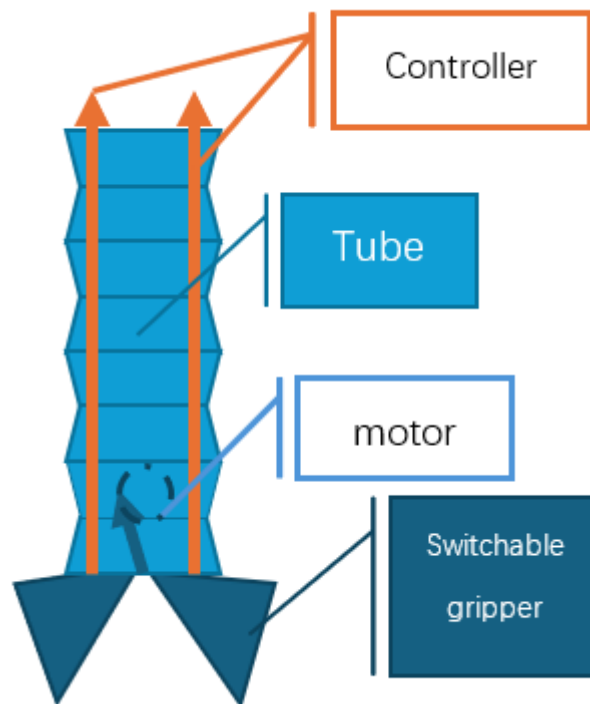


Figure 1. Overall design

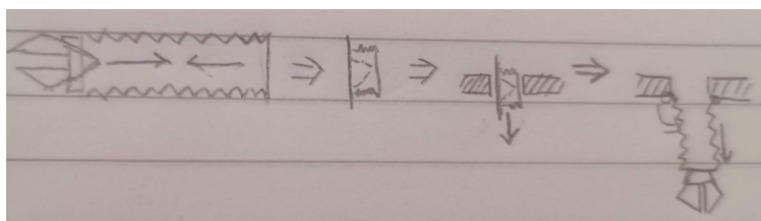


Figure 2. Process of deploying the gripper

3. Conceptual design and analysis

3.1. Clamp structures

3.2. Mechanical clamp

The mechanical gripper consists of two similar components assembled into a scissor-like structure by a rotating hinge, allowing it to fold and fit into narrow gaps. Figure 3 shows the diagram for a single component.

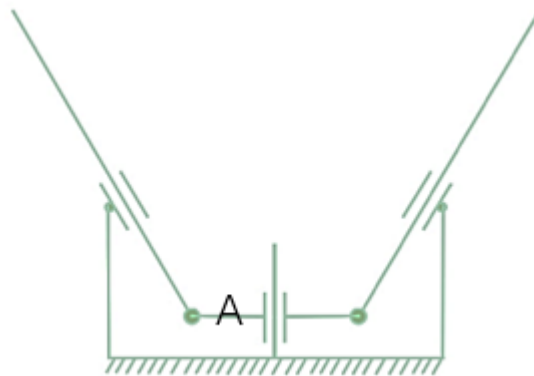


Figure 3. Single component

The degree of freedom for this structure is M ,

$$M = 3(L - 1) - 2J - H = 3(4 - 1) - 2 * 3 + 2 * 2 = 1 \quad (1)$$

Figure 4 shows how the two components are connected. Component 1 essentially has the A part of Component 2 positioned between its A part and the ground. Both components are free to rotate independently, with their grounds linked together. As a result, the grounds can only rotate, while the A parts can also move vertically.

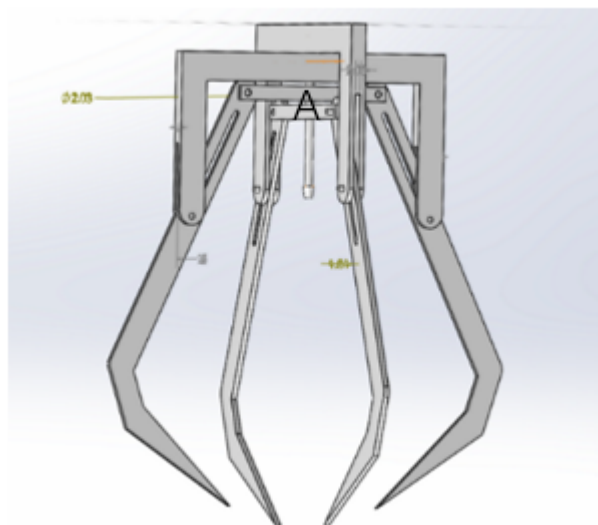


Figure 4. 3D assembly

After being encased in each other, the mechanical claw is formed. To facilitate repositioning after being pulled back for gripping, springs are loaded onto the sliding joints of the A parts.

An experimental model is made and presented in Figure 5 below:

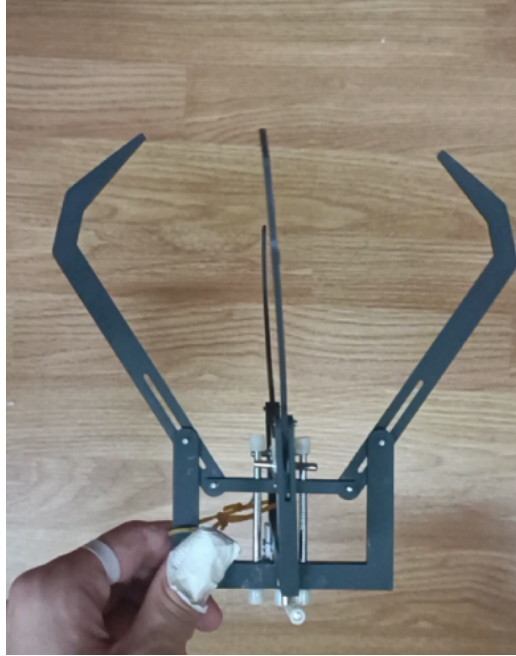


Figure 5. Real-world model

To analyze the folding efficiency of the claws, the relationship of the distance between A and the horizontal part of ground L and the angle between B and the vertical part of ground θ (see fig. 6) is worked out using this formula:

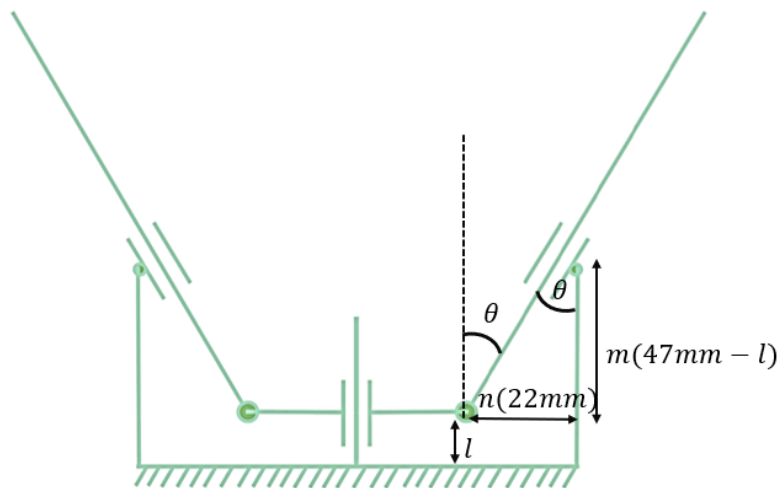


Figure 6. Analysis

$$\theta = \tan^{-1} \frac{n}{m} = \tan^{-1} \frac{22}{47-l} \quad (2)$$

To test and verify the function, data is obtained from measuring the model's dimensions and angles (fig. 7); these are also plotted as dots on the graph. As the graph suggests, it fits the data

points very closely.

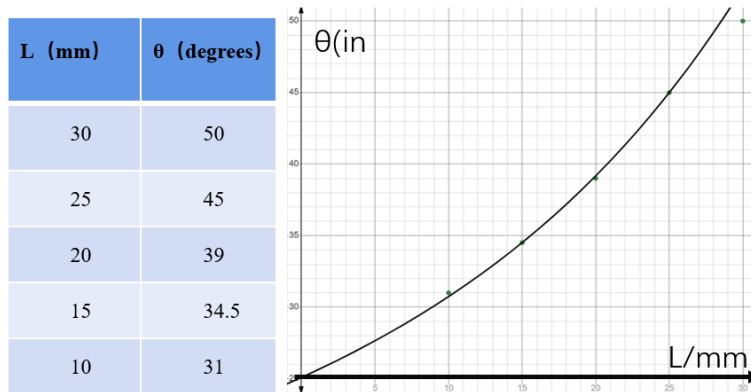


Figure 7. Graphic analysis

3.2.1. Origami clamp

The origami clamp is adapted from the folk toy in southern China, the paper fortuneteller. Fig.8 demonstrates the original pattern of the clamp:

As shown, the structure takes a single-vertex structure, and Tachi's shortcut formula can obtain the DoF of this original structure [2]:

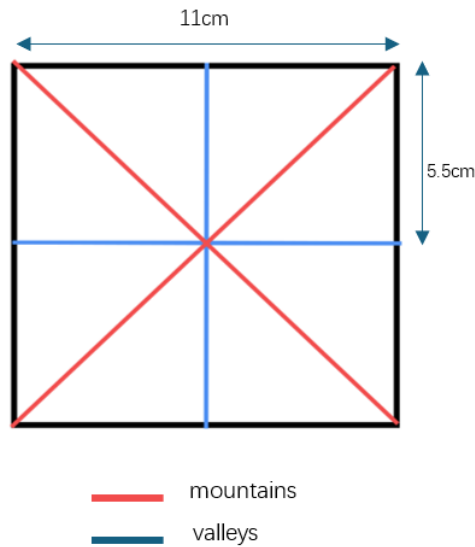


Figure 8. Design of the folding pattern

$$DOF = n - 3 = 8 - 3 = 5 \quad (3)$$

To enable the structure to move through a simple contract & release operation, four mountain creases are connected using stoppers and wires that run through the stoppers to synchronize the contraction (See fig.9).

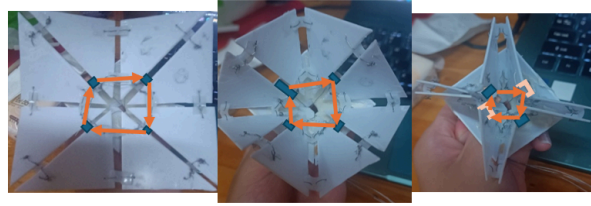


Figure 9. Contraction

and the bottom of the structure is equipped with a hollow pyramid with no baseplate to constrain the gripper so that it wouldn't bend sideways, and its opening angle is limited to a maximum of 180° (see fig.10). As a result, the motion of the structure turns out to be only one way, and the DoF of this structure is reduced to one (supported by the equation below):

$$DOF = initial - constraints = 5 - (3 + 1) = 1 \quad (4)$$

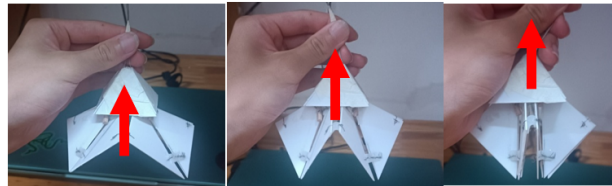


Figure 10. Demonstration

Where 3 are the constraints applied by connecting 4 of the independent mountain creases, and 1 is the constraint of the pyramid cap.

The relationship between the angle θ and the distance between the middle of the clamp and the top of the cap L is derived from the equation:

$$\theta = \beta - \alpha = \beta - \tan^{-1} \frac{(h-l)}{m} = 60^\circ - \tan^{-1} \frac{25\sqrt{3}-l}{25} \quad (5)$$

In this way, we can obtain Figure 11, which shows the change in θ when l differs.

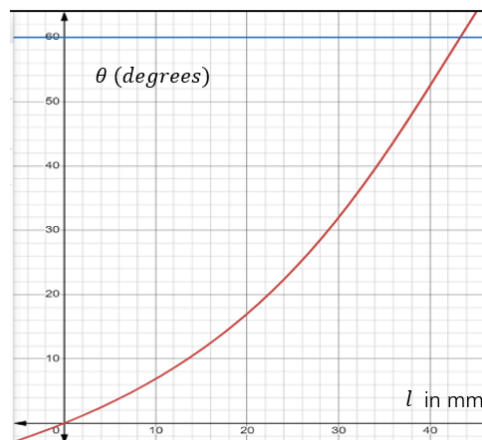


Figure 11. θ on l graph

3.3. Tubular arm

3.3.1. Tube structure

To meet our requirements for foldability, the Tomohiro folding (see figure 12) is chosen to manufacture our tubular robotic arm [3]. By altering the size of the interior angle α , the dihedral angle β , and the angle γ between the crease and the reference plane in the Miura folding unit will also shift. They will follow the equation below [4-7]:

$$\tan \alpha \tan \beta = \tan \gamma \quad (6)$$

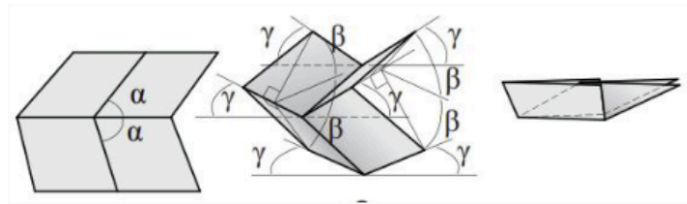


Figure 12. Tomohiro folding

We used a square, foldable, tubular robot arm to fit the selected square gripper jaws. Of the folding units with four, five, or six creases, only the four-crease structure has a single degree of freedom. We made the tube with a “Tomohiro folding,” which is a type of four-crease structure, and the crease design is shown in the figure 13 below [8].

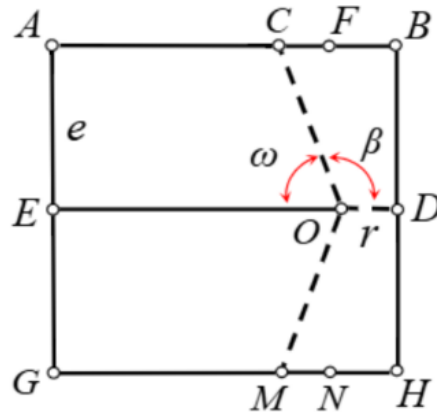


Figure 13. A single chosen folding unit

When the point C coincides with the point A, $\omega = \tan^{-1} \frac{e}{2e-r}$, take $\omega = 45^\circ$, then our chosen folding unit could be obtained.

After acquiring the tube, to realize the miniaturization of the manipulation system, cable control is selected for the robotic arm, which contains four cable strands. Lifting one of the cables causes the robotic arm to contract at one end, allowing it to bend. Lifting all four cables can stow the robotic arm as shown in figure 14.



Figure 14. The tube arm made from the chosen unit

3.3.2. Motion analysis

The basic unit of the tubular robotic arm is a paper spring structure. Its elastic properties could be analyzed using the following model in figure 15.

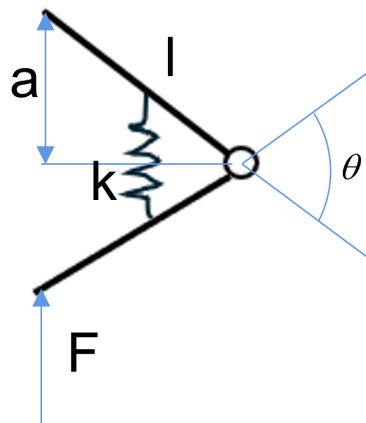


Figure 15. A paper spring unit

By analyzing this model, the following equations could be derived:

$$\frac{da}{d\theta} = \frac{l \cos \frac{\theta}{2}}{2} \quad (7)$$

$$F \Delta a = \frac{k(\Delta\theta)^2}{2} \quad (8)$$

This way, we can obtain the following equation:

$$\Delta a = \frac{F l^2 \cos^2 \left(\frac{\theta}{2} \right)}{2k} \quad (9)$$

As shown in the figure 16, there are four of these units in each layer. Therefore, the equation affecting the deformation of the paper tube is

$$\Delta a = 2 \frac{Fl^2 \cos^2 2(\frac{\theta}{2})}{k} \quad (10)$$

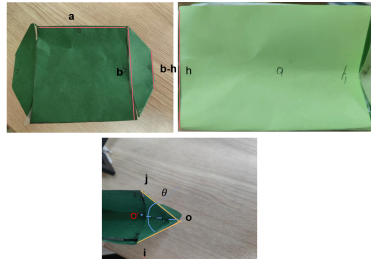


Figure 16. One layer of the paper tube

Furthermore, when the paper tube is folded, the perimeter of the centerline position of each layer constantly changes. It is known that the lengths of the horizontal and vertical centerline positions do not change. Therefore, the positions at which the length changes occur are the four inclined parts, the four parts similar to OO' . With a change in angle, the length of OO' changes.

$$OO' = \frac{h}{2} \sqrt{1 - 2\cos \frac{\theta}{2} + 2(\cos \frac{\theta}{2})^2} \quad (11)$$

The perimeter at the centerline is

$$P = 2a + 2(b - h) + 4OO' \quad (12)$$

Figure 17 shows how the perimeter changes with θ .

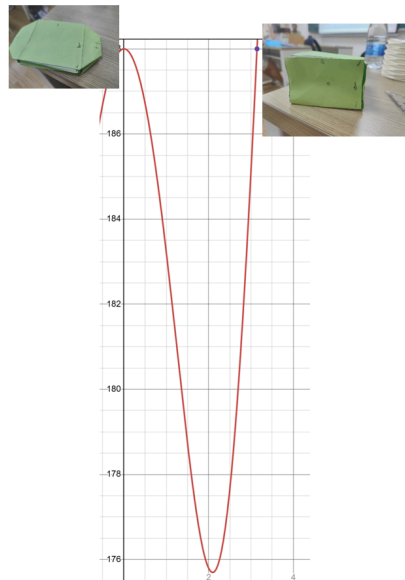


Figure 17. The change in centerline perimeter with the variation of θ

As shown in the above study, the perimeter is equal to the original length of origami paper, and the mechanism is in a stable state when the angle is either 0° or 180° (see figure 18). However, due

to the nature of paper springs, the tube cannot automatically transform the angle to either 0° or 180° , so the mechanism cannot be in stable state by itself.

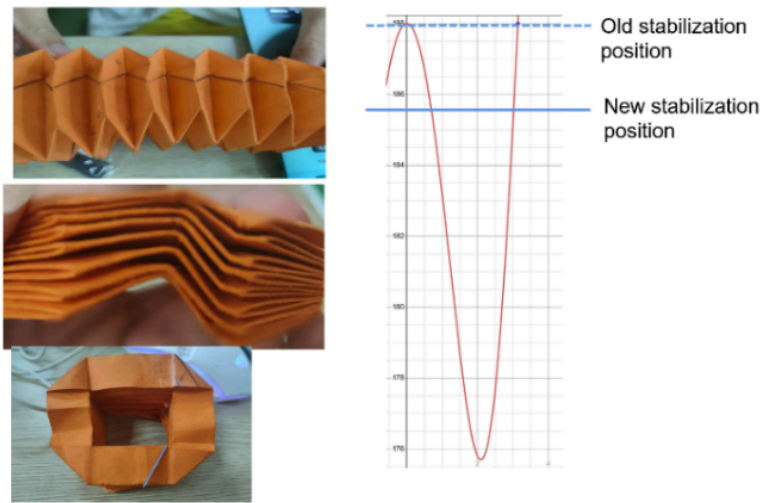


Figure 18. The new crease and how it affects the tube

To make the mechanism reach the stable state, a crease is added, as shown in the figure 19. The new crease changes the length of side a, decreasing the total perimeter of the folded paper and changing the stable point of the folded paper tube. This allows the folded paper tube to tighten automatically after adding the crease, which facilitates the retraction of the robotic arm.

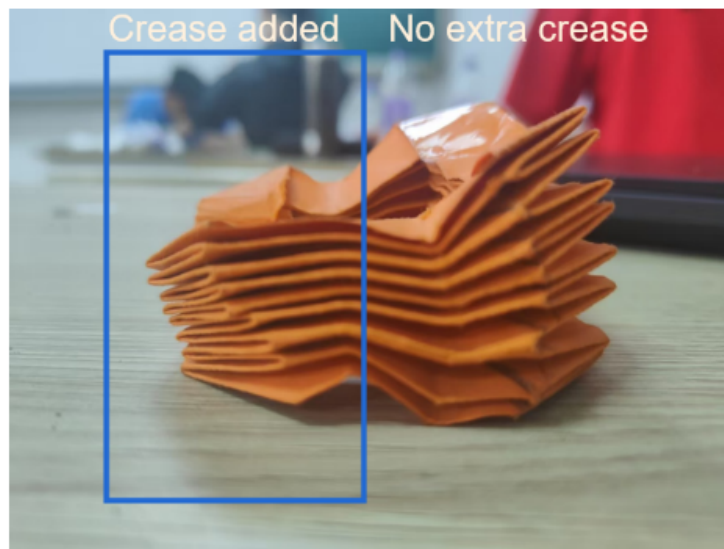


Figure 19. The new crease's rendering

4. Construction of prototypes

4.1. Grippers

The mechanical gripper parts are printed out using black resin and assembled by inserting steel pivots into rotating joints (Figure 20). The posts that the A parts slide upon are loaded with thin springs to help reposition the claws. A rubber band and a stopper have been applied to maintain a 90° angle between the two grounds once released.



Figure 20. The model mechanical gripper

Origami gripper parts are cut out from PVC sheets and connected by silica gel (Figure 21). The stoppers are loaded behind the slit between each mountain crease, and strings are attached from one to another, ultimately merging into a single cord that runs through the top hole on the pyramid cap.

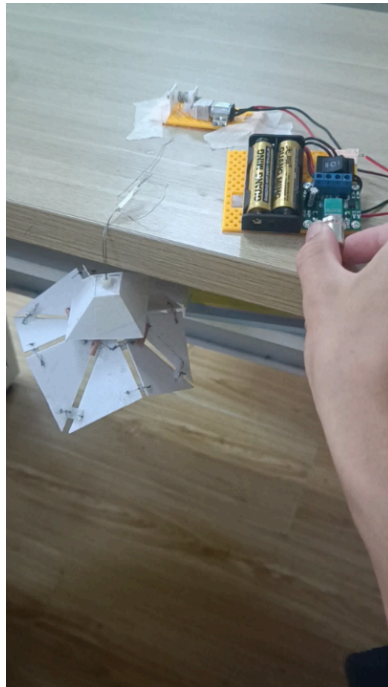


Figure 21. The origami gripper and the controller

4.2. Tube arm

Because folding tubes need to be collapsible and have elasticity at the same time, we chose paper to prototype a tubular robotic arm (Figure 22).



Figure 22. The working model of the tube arm

There are four cables in the tubular robotic arm; stretching one of them can achieve the contraction of the robotic arm. In this way, we can gain control over the robotic arm.

5. Final prototype



Figure 23. Final prototype

By combining the two parts, we can obtain our final prototype (Figure 23). A motor-powered mini capstan would wind the cord on each of the grippers and make them contract.

6. Conclusion

Conventional lost item retrieval tools often struggle to adapt to narrow environments, such as drain grates, due to their fixed structures and poor adaptability. This makes it difficult to handle items of various shapes and navigate complex, confined spaces. These limitations reduce their retrieval efficiency and stability. To overcome these limitations, this study designed a portable lost item retrieval clamp integrated with a modular system. This design enables efficient and flexible retrieval in narrow environments.

Built on a modular system, the device uses a foldable tubular arm inspired by Yoshimura origami. It is driven by an electric motor-controlled cable system and equipped with interchangeable end effectors: a mechanical clamp for flat objects and an origami-based clamp for cylindrical or prismatic objects. These features allow the device to meet the recovery needs of objects of various shapes. Additionally, structural and mathematical analyses were conducted, including degree-of-freedom calculations and clarification of folding component relationships, to ensure clear system operational logic. A prototype was built and tested to validate the design's effectiveness. The control system enables compact operation in narrow spaces and adapts to complex recycling scenarios.

Overall, the tested recycling claw modular system is stable and effective, providing a compact, adaptable solution for recovering lost items in confined spaces. However, there are still issues that need to be addressed, such as improving the flexibility of tool interchangeability, enhancing the sensitivity of arm control, and optimizing the balance between material durability and performance. Future efforts will focus on improving fixture interchangeability, enhancing arm control precision, and optimizing materials to improve durability and performance. These efforts will expand the application potential of the system in narrow-space recovery operations and provide new design strategies for similar portable recovery devices.

Acknowledgement

Jiayang Xi and Jinhui Guo contributed equally to this work and should be considered co-first authors.

References

- [1] Nishimura, T., Muryoe, T., Asama, Y., Ikeuchi, H., Toshima, R., & Watanabe, T. (2022). Single-fingered reconfigurable robotic gripper with a folding mechanism for narrow working spaces. *IEEE Robotics and Automation Letters*, 7(4), 10192-10199.
- [2] Tachi, T. (2010, November). Geometric considerations for the design of rigid origami structures. In *Proceedings of the International Association for Shell and Spatial Structures (IASS) Symposium (Vol. 12, No. 10, pp. 458-460)*. Shanghai, China: Elsevier Ltd.
- [3] Kim, S. J., Lee, D. Y., Jung, G. P., & Cho, K. J. (2018). An origami-inspired, self-locking robotic arm that can be folded flat. *Science Robotics*, 3(16), eaar2915.
- [4] Tachi, T. (2010). Freeform rigid-foldable structure using bidirectionally flat-foldable planar quadrilateral mesh. In *Advances in architectural geometry 2010* (pp. 87-102). Springer, Vienna.
- [5] Tachi, T. (2011). Rigid-foldable thick origami. *Origami*, 5(5), 253-264.
- [6] Miura, K., & Tachi, T. (2010). Synthesis of rigid-foldable cylindrical polyhedra. *Symmetry: Art and Science*, 2010, 204-213.
- [7] Tachi, T. (2010). Freeform Variations of Origami. *Journal of Geometry and Graphics*, 14, 203-215.

- [8] Chen, Y., Lv, W., Li, J., & You, Z. (2017). An extended family of rigidly foldable origami tubes. *Journal of Mechanisms and Robotics*, 9(2), 021002.